




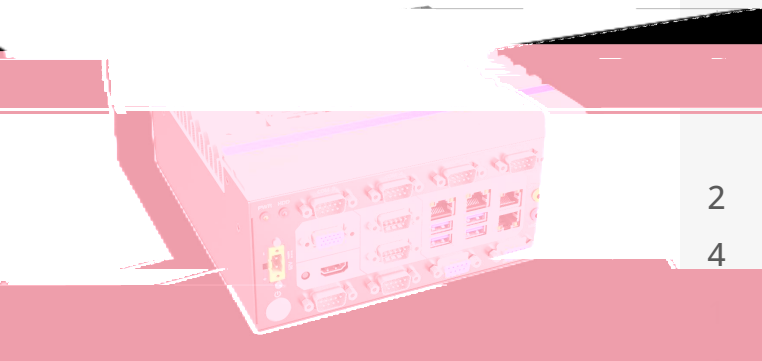

5- 64 B
A+
4 B 3.0
2 232/422/485, 6 232 2 8
4 A
.2 B- 3052 5
1 .2 - /B
C 12

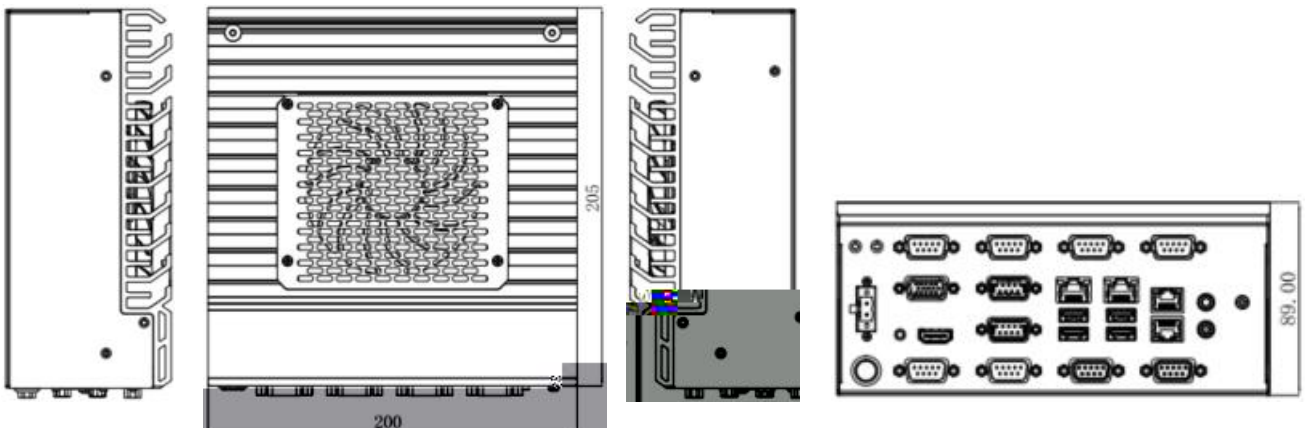

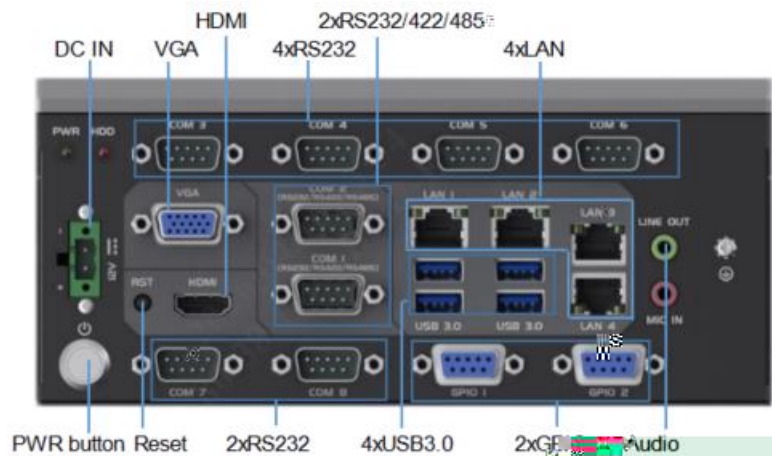

		3450									
	B										
		2	5		,			,	64		
		/ / 10/ 11									
/	B	4	B3.0,	1	B2.0	A	B				
	C	2	232/422/485		6	232					
		2	B9 8								
		1	, 1								
	C / .2/ C -	1	.2	-	/B		5				
		1	.2 B-	3052							
		1	A, 1								
		2	A A3.0,	1	.2	(C 5.0 4)					
	A C	6186									
	A	1	-	, 1	-						
	A C	3	8111	-C	, 1	8531	-CA				
		4	45								
		12	, C- ,								
		2-	C								
		1	255	./		.					
	C	32	330	C-	-2701						
	(* *)	200*205*89									
		/ -									
	.	-10	60								
	.	-40	85								
		95%@40°C -									
		: 15 , C 60068-2-27, , 11									
		:2 , C 60068-2-64, 5 500 1 /									