EVC-7210

Version 1.0

目 录

1 1
1.1 1
1.2 1
2 3
2.1 3
2.2 3
2.3 3
2.3.1 3
2.4 3
3 4
3.1 EVC-7210~7216 4
3.2 4
3.2.1 EVC-7210 4
3.2.2 EVC-7211 4
3.2.3 EVC-7213 5
3.2.4 EVC-7214 5
3.2.5 EVC-7216 6
3.3 6
3.3.1 EVC-7210 6
3.3.2 EVC-7211 7
3.3.3 EVC-7213 7
3.3.4 EVC-7214 8
3.3.5 EVC-7216 8
4 9
4.1 9
4.2 9
4.3 10
5 11
5.1 EVC-7210 11
5.2 EVC-7211 12
5.3 EVC-7211 (POE) 13
5.4 EVC-7213 14
5.5 EVC-7214 15
5.6 EVC-7215 16
5.7 EVC-7210 c 17
5.8 19
5.9 19
5.10 20
5.10.1 20
5.10.2 20

5.10.3 COM1/2 20
5.10.4 SATA_PWR1 21
5.10.5 SATA1 21
5.10.6 F_USB1 21
5.10.7 F_AUDIO1 22
5.10.8 FAN1 22
5.10.9 JRSTBTN1 22
5.10.10 JPOE 22
5.10.11 JPOE1 22
5.10.12 EVC-7211 23
5.10.13 EVC-7213 23
6 24
6.1 24
6.1.1 EVC-7210 24
6.1.2 EVC-7211 25
6.1.3 EVC-7213 26
6.1.4 EVC-7214 27
6.1.5 EVC-7216 28
6.2 29
6.3 M.2 2242/2280 29
6.4 mSATA SSD 30
6.5 4G/5G 30
7 BIOS 31
7.1 BIOS 31
7.2 BIOS 31
7.2.1 BIOS 31
7.2.2 31
7.3 BIOS 32
7.4 Main 32
7.5 Advanced 33
7.6 Chipset 39
7.7 Security 40
7.8 Boot 41
7.9 Save&Exit 42
8 WDT 43
8.1 WDT 43
10 44
11 45
11.1 45

LED	- 1 Power LED, 1 HDD LED
	- 2 RS232/422/485(DB9),
	- 1 Mini-PCIe SIM 4G/5G)
Watch Dog	- 1 to 255 sec/min. per step
BIOS	- AMI UEFI/Legacy BIOS
	- Win7/Win10/Linux
	- : -10 50 ; : 0% 95%,
	- : -40 85 ; : 0% 95%,
	- With SSD:2Grms, IEC 60068-2-64, random 5~500Hz 1 hr/axis
	- With SSD: 15G, IEC 60068-2-27, half sine, 11ms duration
	- EVC-7210 : 12V to 24V DC-in, 2Pin - EVC-7211/7213: 24V DC in
	- /
W x H x D	- EVC-7210 63.5mm(W)*200mm(H)*150 mm(D) - EVC-7211/7213/7214: 78mm(W)*200mm(H)*150 mm(D) - EVC-7216: 82mm(W)*200mm(H)*150 mm(D)

2

2.1

2.2

-40 85
0% 95%
10cm
50cm

⚠

12

2.3

2.3.1

-
-
-
-

2.4

-
-
-
- 50mm 100mm
- (
-
- I/O 0.5V

3.2.3 EVC-7213

mm

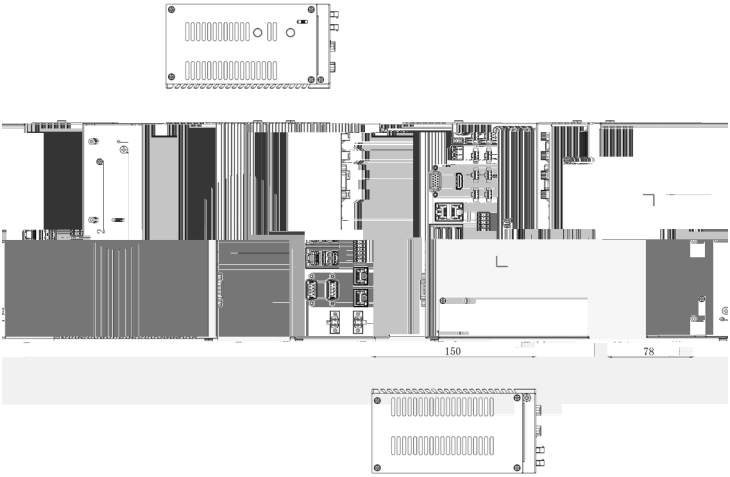

3.2.4 EVC-7214

mm

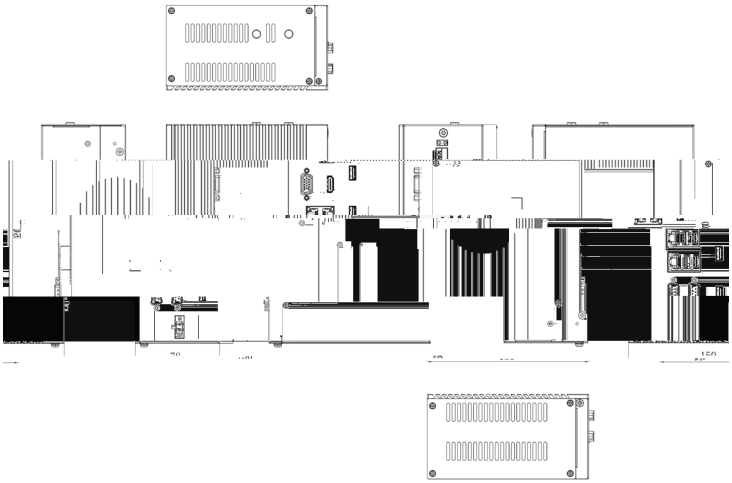

3.2.5 EVC-7216

mm

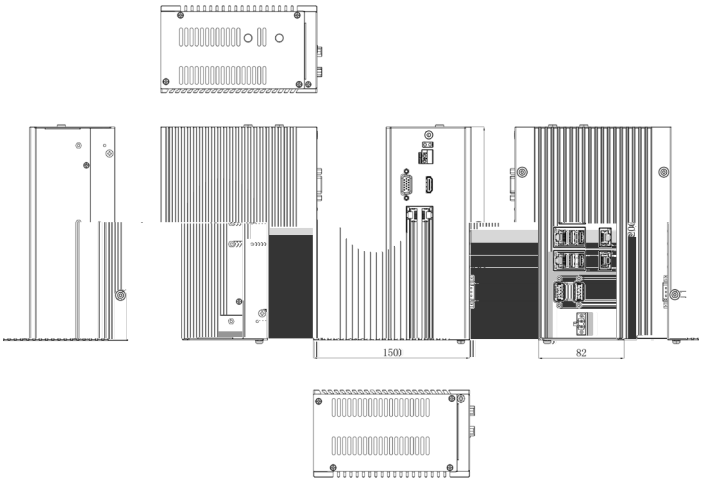

3.3

3.3.1 EVC-7210

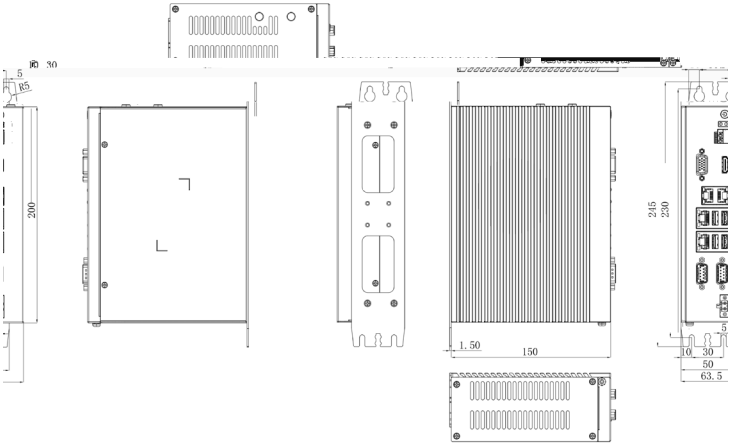

3.3.4 EVC-7214

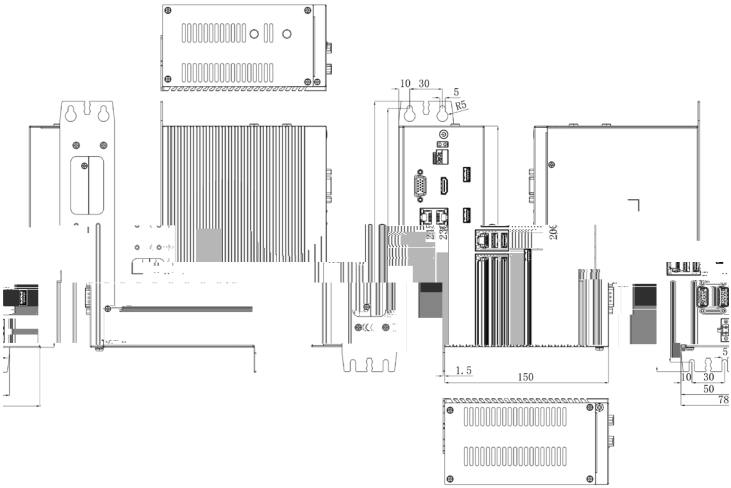

3.3.5 EVC-7216

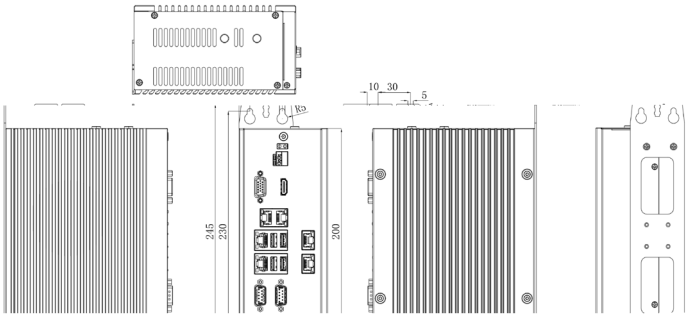

4

4.1

⚠

⚠

⚠

I/O USB I/O

4.2

I/O

2.5mm2 0.1Ω	

4.3

DCIN / 12V~24V	

⚠

5.2 EVC-7211

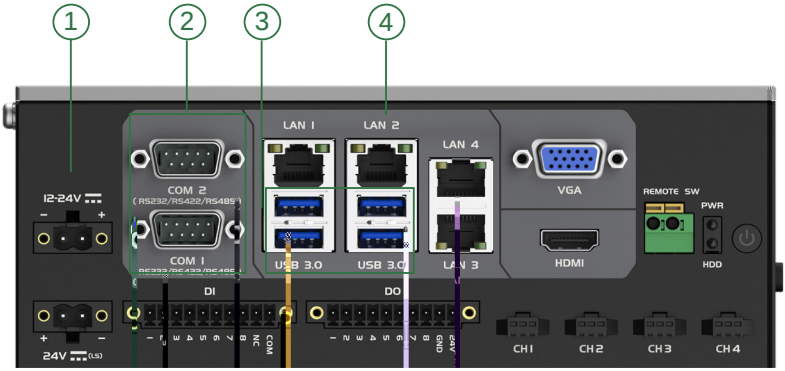
1
2
3
4
12-24V
COM 2
(RS232/RS422/RS485)
COM 1
LAN 1
LAN 2
LAN 4
LAN 3
USB 3.0
USB 3.0
VGA
HDMI
REMOTE SW
PWR
HDD
DI
DO
24V (LS)
CH 1
CH 2
CH 3
CH 4

AVACSDC
POWER
Power Input
Power Output
RS485 / RS422
RS232
COM 1
COM 2
COM 3
COM 4
COM 5
COM 6
COM 7
COM 8
RS232 / RS422
RS232 / RS485
COM 9
COM 10
COM 11
COM 12
COM 13
COM 14
COM 15
COM 16
COM 17
COM 18
COM 19
COM 20
COM 21
COM 22
COM 23
COM 24
COM 25
COM 26
COM 27
COM 28
COM

5.4 EVC-7213

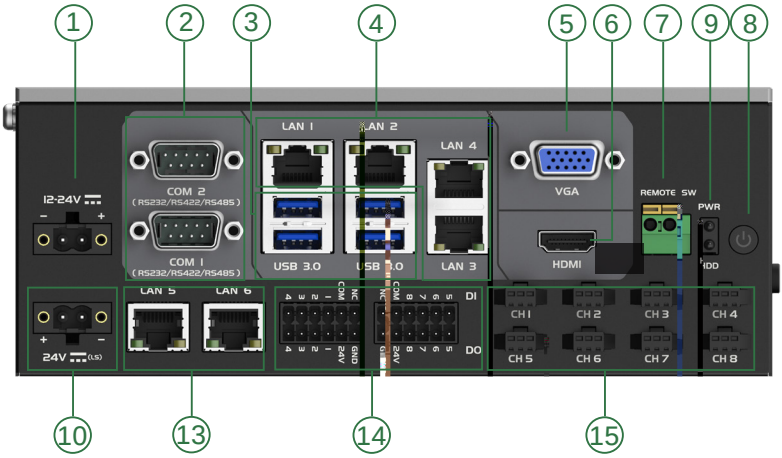
1
2
3
4
5
6
7
9
8
12-24V
COM 2
(RS232/RS422/RS485)
COM 1
(RS232/RS422/RS485)
LAN 1
LAN 2
LAN 4
LAN 3
USB 3.0
USB 3.0
VGA
HDMI
REMOTE SW
PWR
HDD
LAN 5
LAN 6
24V
DI
DO
CH 1
CH 2
CH 3
CH 4
CH 5
CH 6
CH 7
CH 8
10
13
14
15

5.5 EVC-7214

EVC-7214
REMOTE SW
PWR
HDD
VGA
HDMI
LAN 4
LAN 3
USB 3.0
LAN 2
LAN 1
USB 3.0
USB 3.0
USB 3.0
USB 3.0
USB 3.0
USB 3.0
COM 1
(RS232/RS422/RS485)
COM 2
(RS232/RS422/RS485)
DC IN
12-24V
-
+

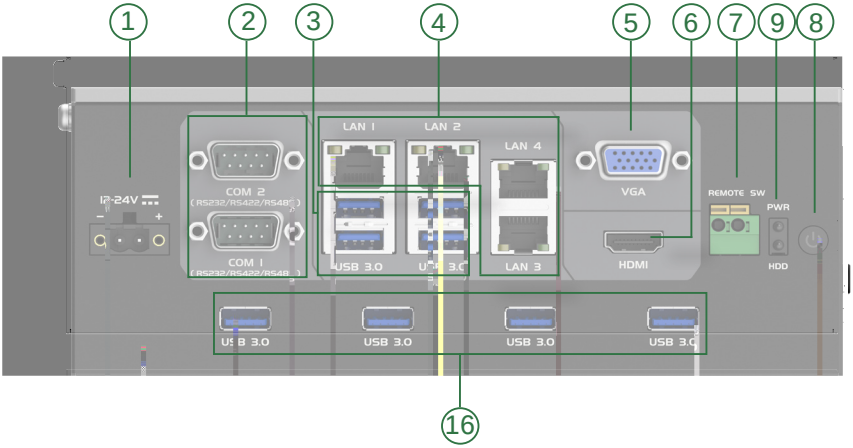
1
2
3
4
5
6
7
9
8
16
12-24V
COM 2
(RS232/RS422/RS485)
COM 1
(RS232/RS422/RS485)
LAN 1
LAN 2
LAN 4
LAN 3
USB 3.0
USB 3.0
USB 3.0
USB 3.0
USB 3.0
USB 3.0
VGA
HDMI
REMOTE SW
PWR
HDD

5.6 EVC-7216

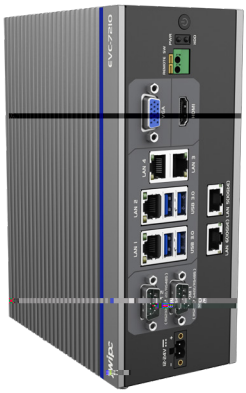
EVC-7210
LAN 4
LAN 3
LAN 2
LAN 1
LAN 6(10GbE)
LAN 5(10GbE)
VGA
HDMI
REMOTE SW
PWR
HDD
12-24V
COM 2
(RS232/RS422/RS485)
COM 1
(RS232/RS422/RS485)
USB 3.0
USB 3.0
LAN 1
LAN 2
LAN 3
LAN 4
LAN 5(10GbE)
LAN 6(10GbE)

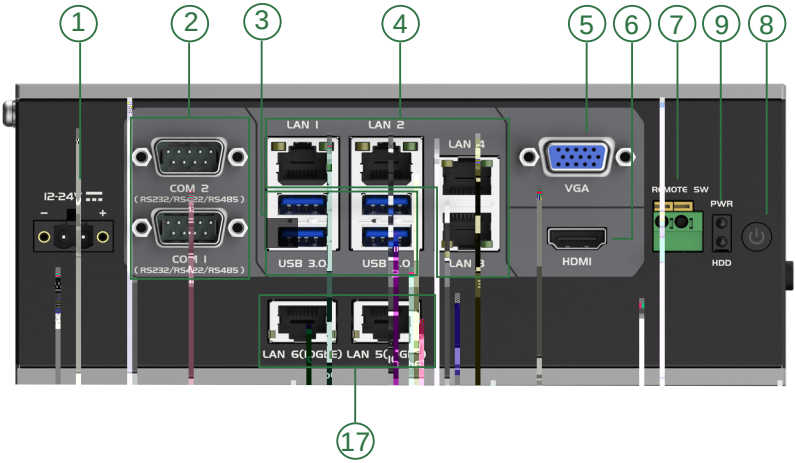
1
2
3
4
5
6
7
9
8
17

5.7 EVC-7210

5.7.1 EVC-7210



5.7.2 EVC-7211/7213



5.7.3 EVC-7214



1. DC_IN DC

5.8

		LED	
POWER	PC		
			PC
HDD			

5.9

2pin

	1	DC-
	2	DC+

5.10

5.10.1

2

3 1 2 2 3



1-2 2-3

1

1. "1" 1
2.

5.10.2

JME1

1-2	Disable ME
2-3	Normal default

ATX_M1

1-2	ATX MODE default
2-3	AT MODE

JP1

1-2	5G supply 3.8V default
2-3	5G supply 3.3V

5.10.3 COM1/2

PIN	RS232	RS422	RS485
1	/	422TX-	485-
2	SIN	422TX+	485+
3	SOUT	422RX+	/
4	/	422RX-	/
5	GND	/	/
6	/	/	/
7	RTS	/	/
8	CTS	/	/
9	/	/	/

RS232/422/485 BIOS

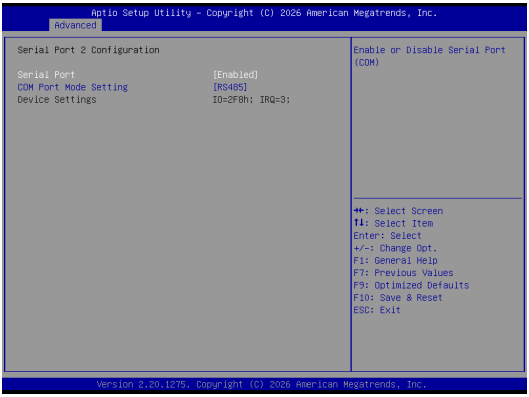

5.10.4 SATA_PWR1

1	+V5
2	GND
3	GND
4	+V12

5.10.5 SATA1

1	GND
2	SATA_TX_P
3	SATA_TX_N
4	GND
5	SATA_RX_N
6	SATA_RX_P
7	GND

5.10.6 F_USB1

1	+V5	2	+V5
3	USB2_N1	4	USB2_N2
5	USB2_P1	6	USB2_P2
7	GND	8	GND
		10	GND

5.10.12 EVC-7211

MUART1 mcu log

1	RX
2	TX
3	GND

MBOOT1 mcu 2-3

1	3.3V
2	MCU_BOOT
3	GND

MSWD1 mcu

1	3.3V
2	SWDIO
3	SWCLK
4	NRST
5	GND

5.10.13 EVC-7213

MUART1 mcu log

1	RX
2	TX
3	GND

MSWD1 mcu

1	3.3V
2	SWDIO
3	SWCLK
4	NRST
5	GND

6

6.1

6.1.1 EVC-7210

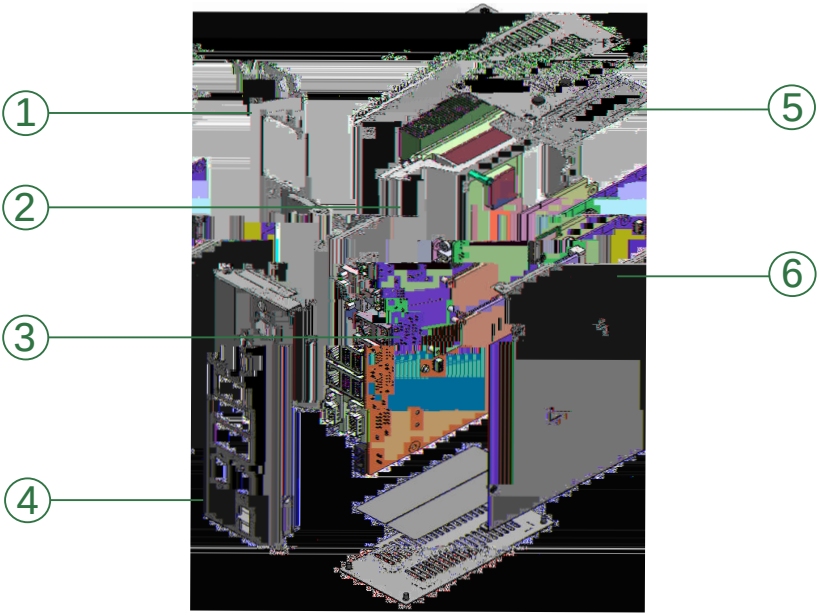

1		2		3	
4		5		6	

6.1.2 EVC-7211

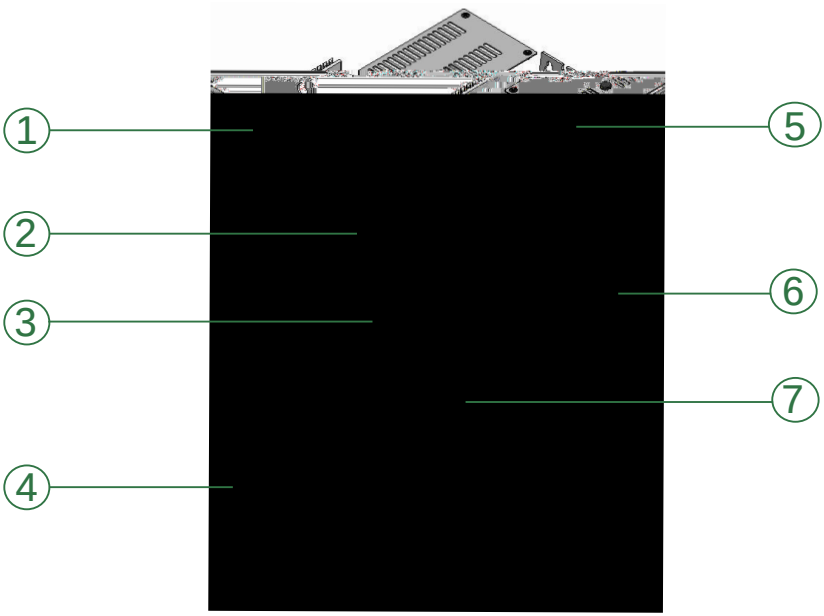

1		2		3	
4		5		6	
7					

6.1.3 EVC-7213

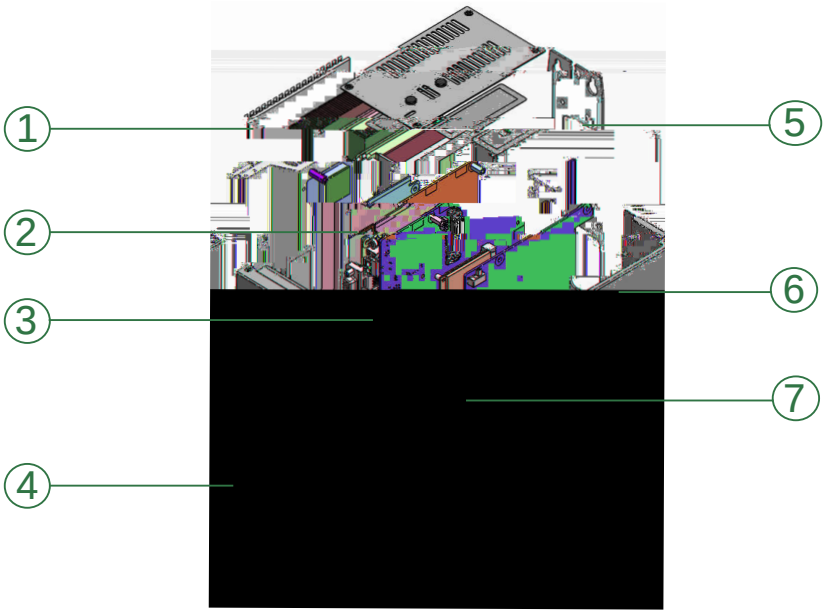

1		2		3	
4		5		6	
7					

6.1.4 EVC-7214

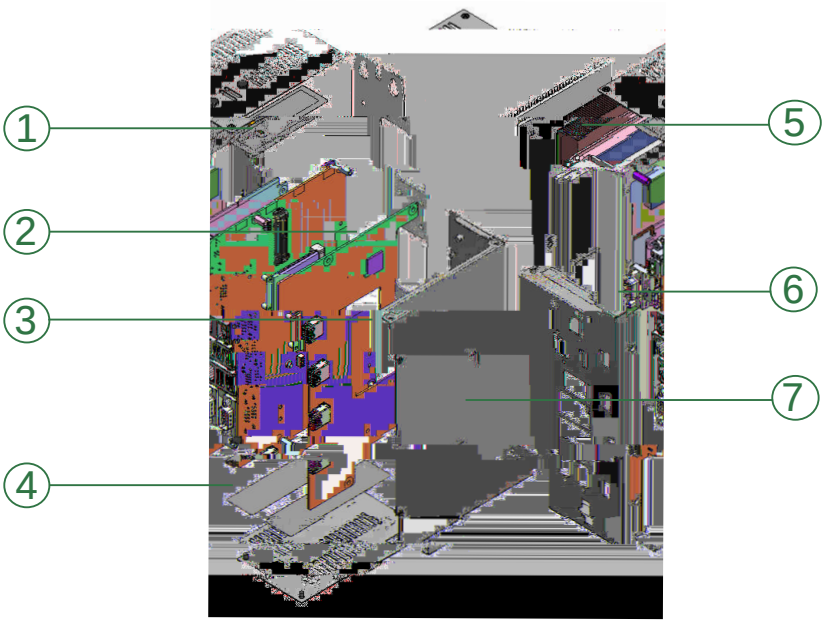

1		2		3	
4		5		6	
7					

6.1.5 EVC-7216

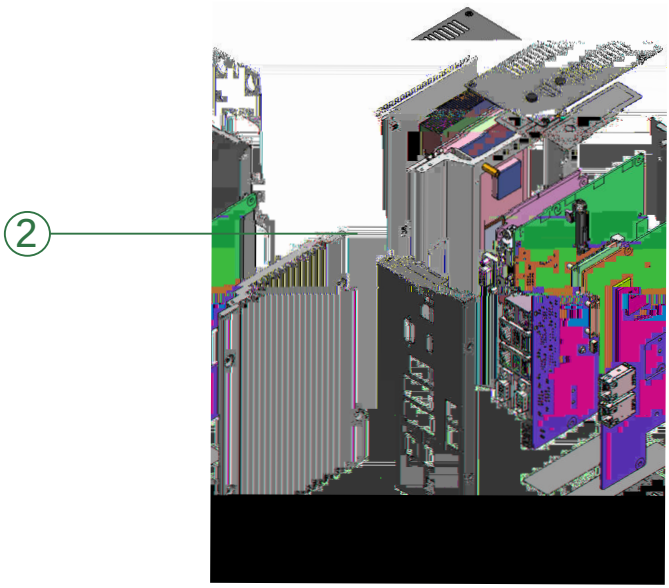

6.2

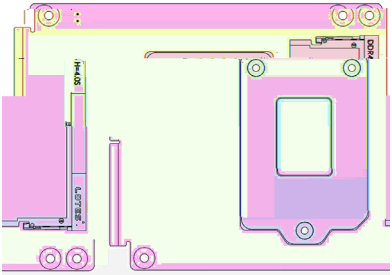

DIMM1 DIMM2

1.
2.
3. 30° DIMM1/2

6.3 M.2 2242/2280

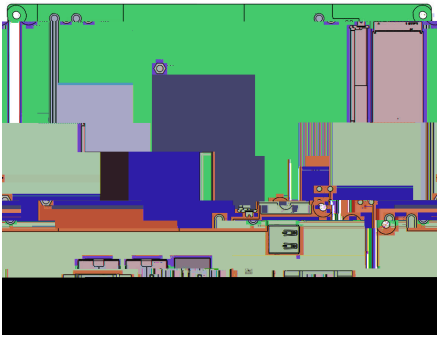

M.2 1 M2 M.2 2242/2280 NVMe SSD

1. 30°
2. M.2 2242 M.2 2280 M.2 2242

6.4 mSATA SSD

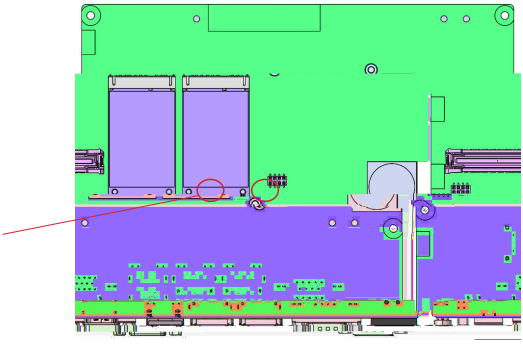

mSATA 2 mSATA mSATA SSD

30°

6.5 4G/5G

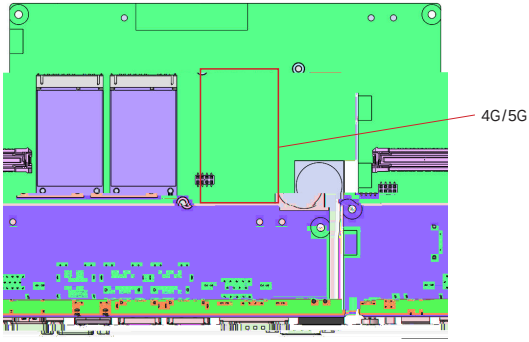

4G/5G

4G/5G 30°

7.3 BIOS

Main		BIOS
Advanced		BIOS
Chipset		
Security		
Boot		
Save & Exit		BIOS

7.4 Main

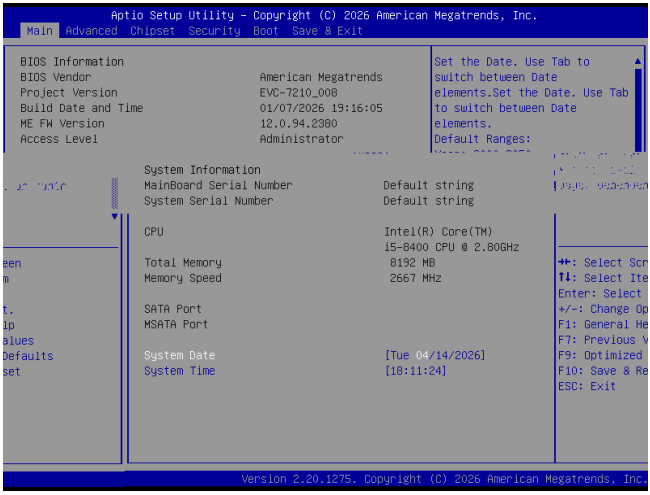

System Date ( )

, “ , / / ”

System Time

< >< >< >

7.5 Advanced

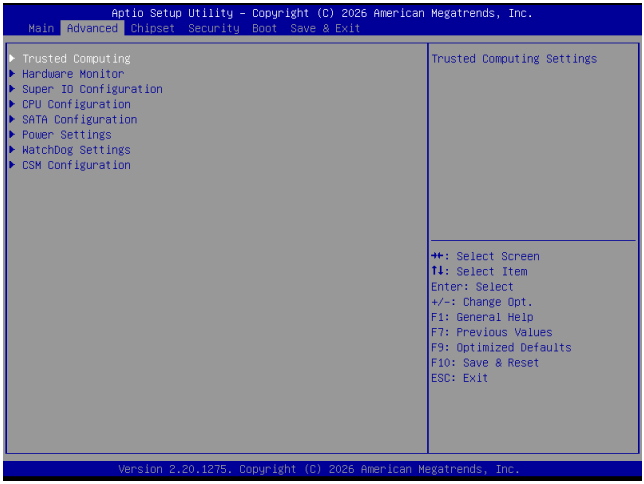

Trusted Computing		
Hardware Monitor		
Super IO Con f guration	I0	
CPU Con f guration	CPU	
SATA Con f guration	SATA	
Power Settings		
WatchDog Settings		
CSM Con f guration	CSM	

Trusted Computing <Enter>

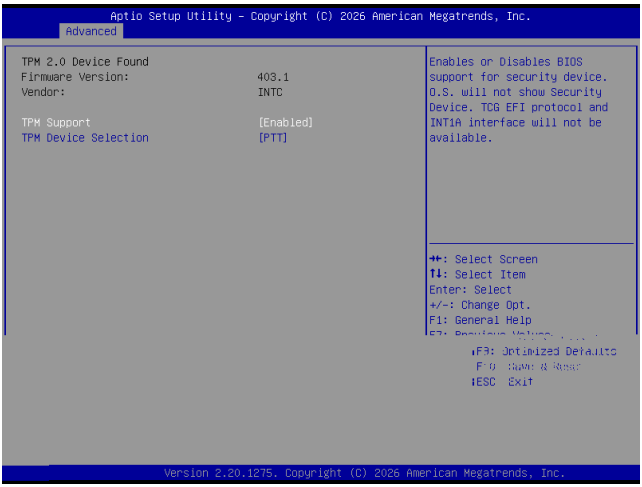

TPM Support

TPM Disable,Enable.

TPM Device Selection

TPM dTPM, PTT.

Hardware Monitor <Enter>

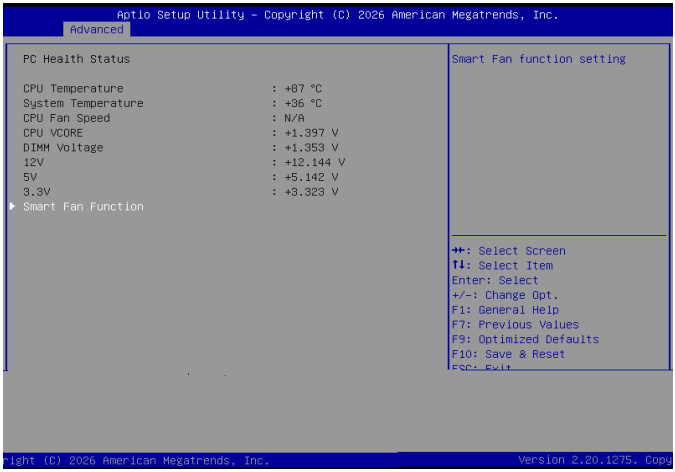

Smart Fan Funtion

Super IO Con f guration <Enter>

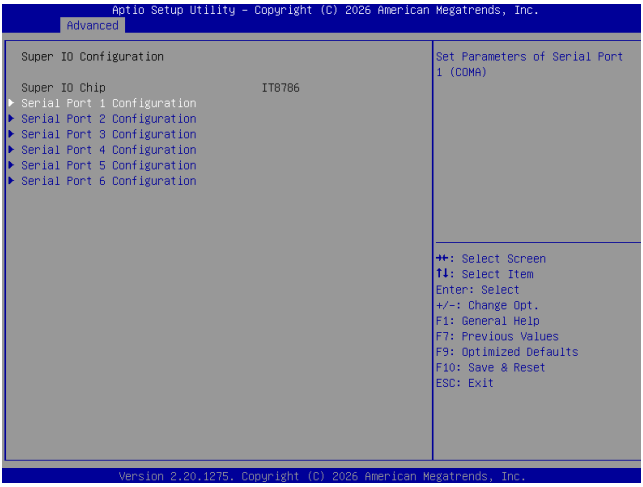

Serial Port 1/2/3/4/5/6 Con f guration

CPU Con f guration <Enter>

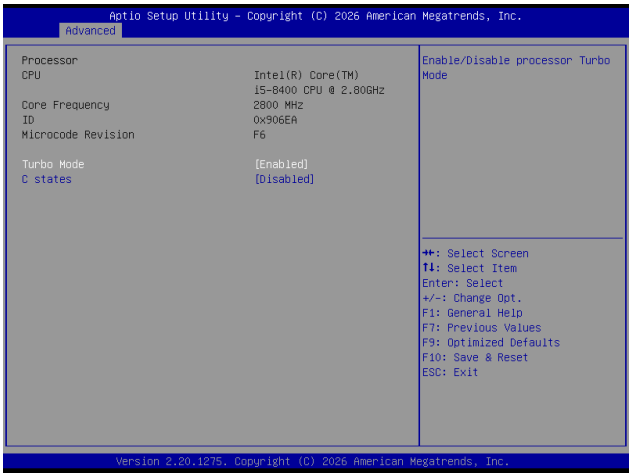

Turbo Mode

Turbo Disabled,Enabled.

C states

CPU Disabled,Enabled.

SATA Con f guration <Enter>

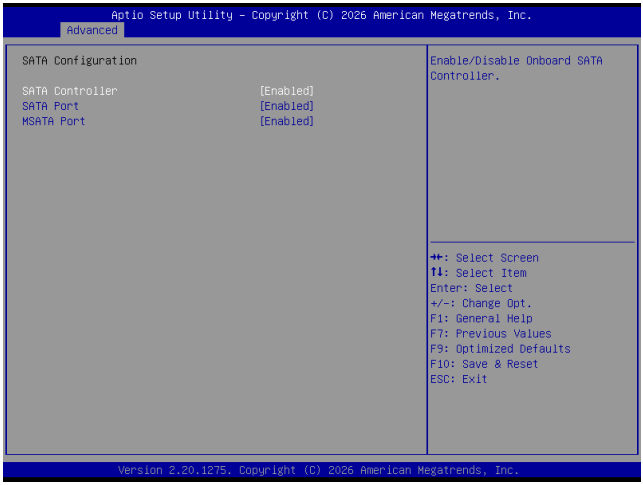

SATA Controller

SATA Enabled,Disabled.

SATA Port

SATA Enabled,Disabled.

MSATA Port

MSATA Enabled,Disabled.

Power Settings <Enter>

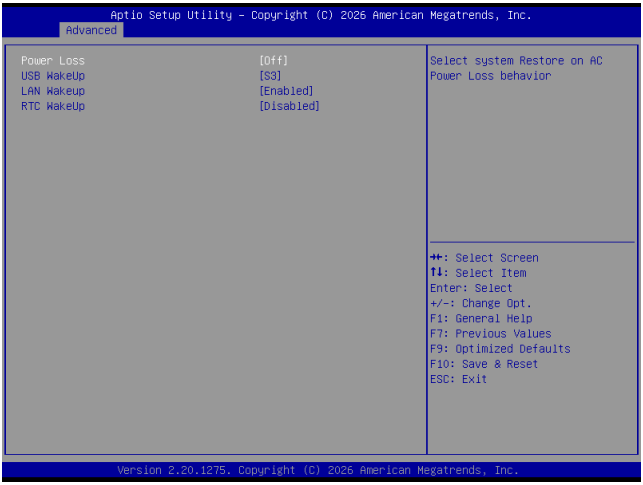

Power Loss

/ / AC

Off, On,Last Status.

USB Wakeup

USB Enabled,Disabled.

LAN Wakeup

Enabled,Disabled.

RTC Wakeup

RTC Disabled,Fixed Time,Dynamic Time.

WatchDog Configuration <Enter>

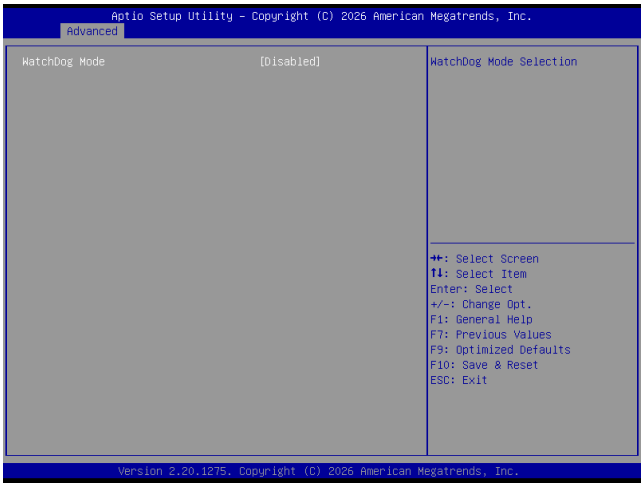

WatchDog Mode

Enabled,Disabled.

CSM Configuration <Enter>

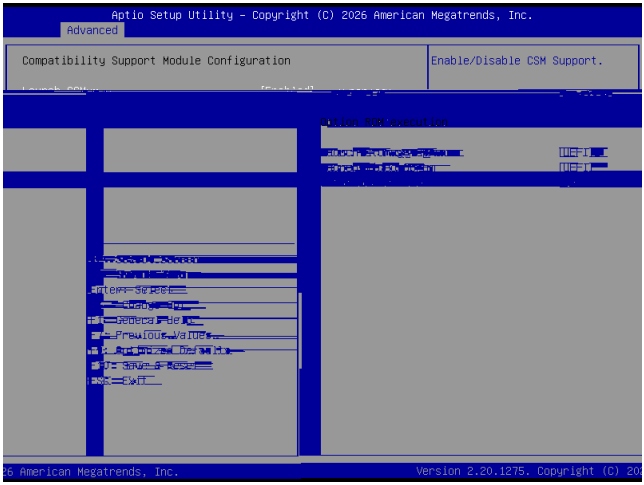

Launch CSM

CSM Disabled,Enabled.

Launch Storage Oprom

Storage Oprom Do not launch,UEFI,Legacy.

Launch Video Oprom

Oprom Do not launch,UEFI,Legacy.

Other PCI devices

PCI Oprom Do not launch,UEFI,Legacy.

7.6 Chipset

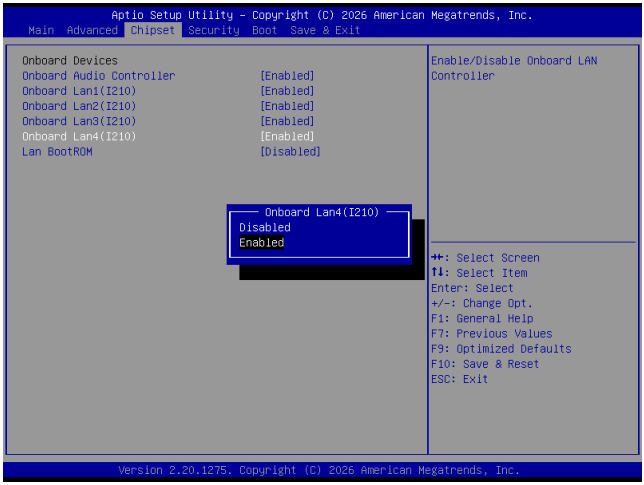

Onboard Audio Controller d oller

7.7 Security

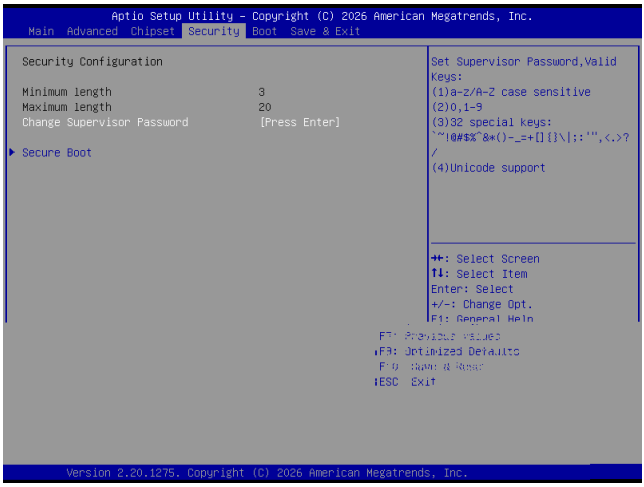

Change Supervisor Password

1. Change Supervisor Password <Enter>
2. “ Create New Password ” 3~20 <Enter> “ Confrm Password ”

“ Invalid Password! ”

“ Change Supervisor Password ” “ Enter Current Password ”

“ Create New Password ” <Enter>

7.8 Boot

Setup Prompt Timeout

Bootup NumLock State

Numlock On NumLock

Of Numlock

On,Of.

USB Mass Storage Support

USB

7.8 Save & Exit

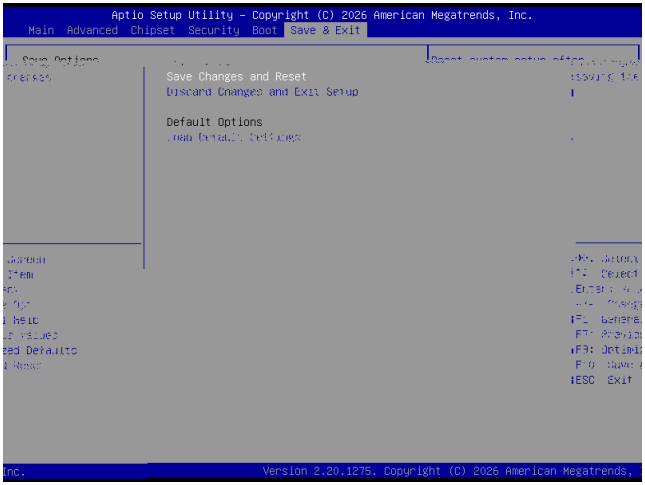

Save Changes and Reset

Discard Changes and Exit Setup

Load Default Settings

8 WDT

8.1 WDT

```
#define SuperIo_Index_Port 0x2E
#define SuperIo_Data_Port 0x2F

UINT8 Data8
//a. Enter Super IO Configuration Mode
IoWrite8(SuperIo_Index_Port, 0x87);
IoWrite8(SuperIo_Index_Port, 0x01);
IoWrite8(SuperIo_Index_Port, 0x55);
IoWrite8(SuperIo_Index_Port, 0x55);
//b. Select Logic Device, LDN 7
IoWrite8(SuperIo_Index_Port, 0x07);
IoWrite8(SuperIo_Data_Port, 0x07);
//d. Set WDT mode Second or Minute    Register 0x72 Bit7 value:1-Second;0- Minute
IoWrite8(SuperIo_Index_Port, 0x72);
//Set Second mode
IoWrite8(SuperIo_Data_Port, IoRead8(SuperIo_Data_Port) | 0x80);
// Set Minute mode
// IoWrite8(SuperIo_Data_Port, IoRead8(SuperIo_Data_Port) & 0x7F);
//e.Set WDT Time-out value    5 Second or Minute
IoWrite8(SuperIo_Index_Port, 0x73);
IoWrite8(SuperIo_Data_Port, 0x5);
//Enabled WDT
IoWrite8(SuperIo_Index_Port, 0xF1);
IoWrite8(SuperIo_Data_Port, IoRead8(SuperIo_Data_Port) | 0x44);

//Disabeld WDT
IoWrite8(SuperIo_Index_Port, 0x73);
IoWrite8(SuperIo_Data_Port, 0x0);
IoWrite8(SuperIo_Index_Port, 0xF1);
IoWrite8(SuperIo_Data_Port, IoRead8(SuperIo_Data_Port) & 0xBB);
//f.Exit Super IO Configuration Mode
IoWrite8(SuperIo_Index_Port, 0x02);
IoWrite8(SuperIo_Data_Port, 0x02);
```

10

11

11.1

		/
		1 2 12
	“ ”	
		1 2 3
		Winpe
I O		PCI ISA
	BIOS	BIOS Setup BIOS Setup
BIOS		
Boot device not found	BIOS	BIOS “ ” (Boot)
USB	USB 2.0 USB 2.0	USB 2.0
	USB	1 USB Legacy Support USB 2 USB